

ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION




ENCLOSURE: TOTALLY ENCLOSED

STAINLESS STEEL FRAME

COOLING: FAN COOLED

MOUNTING: FOOT

FRAME 184T

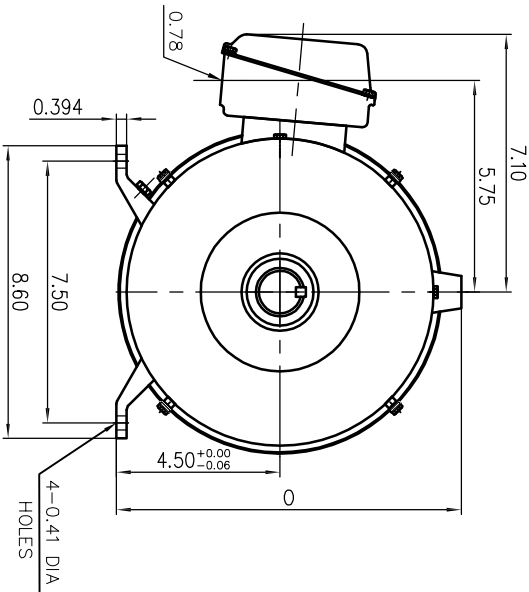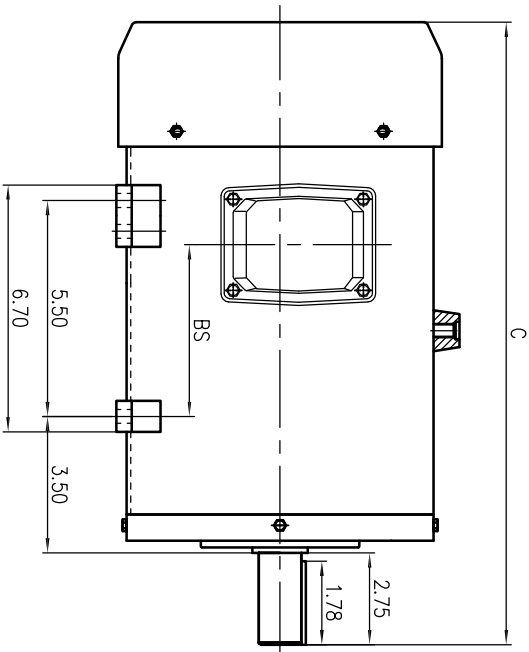

NOTES:

- (1) DIMENSIONS ARE IN INCHES.
- (2) APPROXIMATE WEIGHT = 2HP,6P,- 83 LBS.
3HP,6P,- 86 LBS.
5HP,2P,- 92 LBS.
5HP,4P,- 93 LBS.
- (3) DRIVE END BEARING 6306-2RZ
OPPOSITE DRIVE END BEARING 6306-2RZ

HP	C	O	BS
5HP 2P	17.90	9.20	6.54
2HP 6P	17.90	9.20	6.54
5HP 4P	17.10	9.30	5.75
3HP 6P	17.10	9.30	5.75

FRAME- _____ ITEM _____ HP- _____ RPM- _____ PH- _____ HZ- _____ VOLTS- _____
ORDER- _____ CERTIFIED FOR- _____



DR. BY _____ Hobby
CK. BY _____ SKY
APP. BY _____ J.L.Wong
DATE _____ 04.17.2017

DIMENSION
SHEET
SAS-013283

REMARK
00