
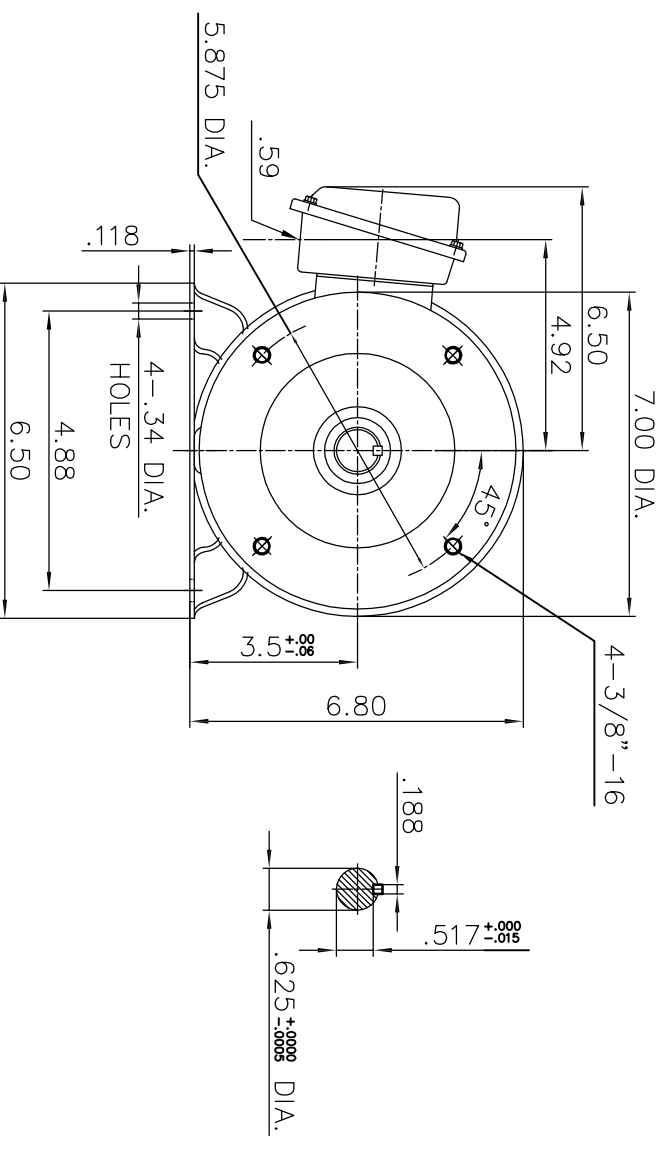


ALTERNATING CURRENT MOTORS

ENCLOSURE: TOTALLY-ENCLOSED
MOUNTING: FOOT WITH C-FACE

SQUIRREL-CAGE INDUCTION
STAINLESS STEEL FRAME
FRAME 56HC

COOLING: FAN COOLED

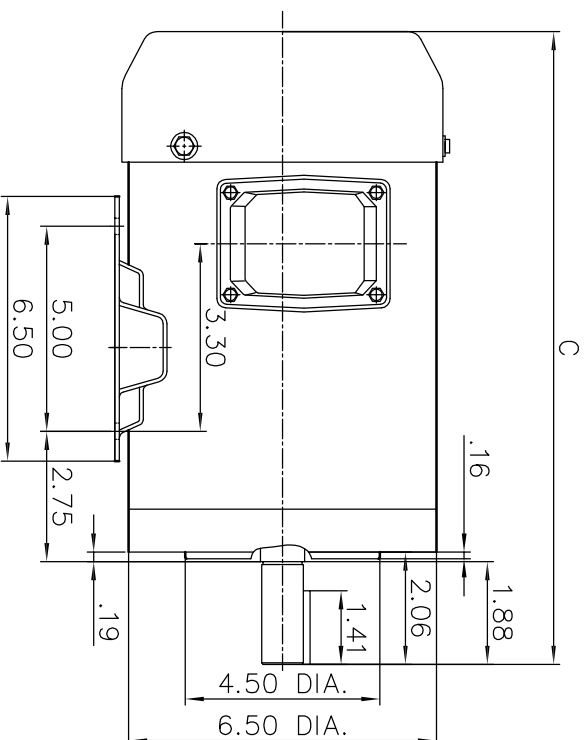

HP	C
3/4HP; 1HP	14.00
1.5HP; 2HP	16.00

NOTES:

- (1) DIMENSIONS ARE IN INCHES.
- (2) APPROXIMATE WEIGHT = 3/4HP, 6P, - 47 LBS. 1HP, 2P, - 48 LBS. 1HP, 4P, - 48 LBS. 1HP, 6P, - 48 LBS. 1.5HP, 2P, - 50 LBS. 2HP, 2P, - 51 LBS. 1.5HP, 4P, - 51 LBS. 2HP, 4P, - 51 LBS.
- (3) DRIVE END BEARING 6205-2RZ
OPPOSITE DRIVE END BEARING 6205-2RZ

FRAME- _____ ITEM _____ HP- _____ RPM- _____ PH- _____ HZ- _____ VOLTS- _____
ORDER- _____



DR. BY Barry
CK. BY Sky Shen
APP. BY C.L. Wong
DATE 2017.04.18

DIMENSION SHEET SAS-013293